



SPECIFICATIONS

MAD PM2-64

Component	SPL Midrange
Size	6.5" (165mm)
Nominal Impedance	4 Ohm
Power RMS	100W
Power MAX	200W
Freq. response	90-12 000Hz
Sensitivity	94dB
Voice Coil	1.5" (38mm) KSV
Cone	Reinforced pressed paper
Spider	Polycotton
Basket	Steel
Magnet	HQ Ferrite
Suspension	2R cloth surround
Weight	0.8 kg

PARAMETERS

	PM2-64
Vas	7.52L
Qts	0.76
Qes	0.84
Qms	7.08
Re	3.40 Ohm
Fs	98.7 Hz

MAD PM2-64

NEXT LEVEL LOUD

Ready to take a stand? The MAD PM2 midrange drivers are here to stay and to make sure you show everyone how LOUD you can be. SPL is not just a couple of midrange drivers and horn tweeters that will wake up the neighbors in the next area, it's a lifestyle! If you're ready to take the next step into the wonderful world of SPL, this is the product for you.

WE MADE SPL SOUND GOOD

Bigger is better, that's just how it is. The bigger and more powerful magnet creates midrange drivers that can produce A LOT of sound. If you're going to crank that volume dial to the max, you will want it to sound good. We added a copper shorting ring just for this purpose, which lowers the distortion, because we care about your ears! SPL is a lifestyle as we said, so as soon as you have installed your first pair of PM2 you will want to add two more and two more after that, and that's OK. The SPL addiction is real!



POWER OF PAPER

We're referring to the pressed paper cone, of course. The MAD PM2-64 is made for playing your favorite music, as LOUD as possible. We wanted this midrange driver to take it to the next level, so we added a bigger (1.5") voice coil. When testing this crazy driver we noticed one thing: for that extra durability, the paper cone needed to be reinforced - which it has!


DOING IT THE SPL WAY

You can do better than two speakers. Come on! More is always better, and we want you to be as LOUD as you possibly can. To make this easier, we've placed two gold plated terminals on the speaker. This makes it easier to add a speaker to your setup, or a tweeter. The choice is yours, but be sure to make a kickass build that'll make GAS proud.

DIMENSIONS (mm)

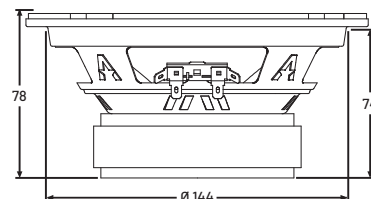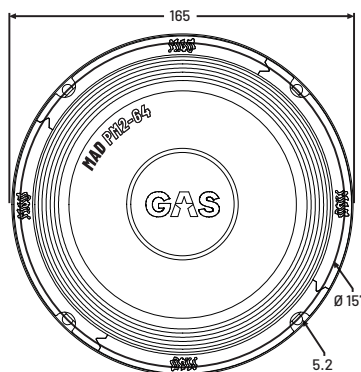


PARTS INCLUDED



Speakers
(2pcs)



Manual



V-type clips
(8pcs)



Screws
(8pcs)